



Shown: SS12181

Decorative Remote Lighting Fixtures

SQ Series - Recessed Square Light

- Suitable for indoor or outdoor applications
- Rectangular, aluminum construction with a watertight, gasketed door and matte white trim
- Flush abolite diffuser

ST Series - Recessed Step Light

- Designed for step and walkway lighting
- Low profile, rectangular design with a matte white finish

RL Series - Recessed Round Light

- Round recessed ceiling unit
- Aluminum trim finished in matte white with steel backbox
- Fresnel lens flush with ceiling

SS Series, RS Series - Step Light with Lens


- Available in surface or recessed mounting
- Steel enclosure with an opal glass lens
- Single or double lamp operation

RG Series - Round Par 36 Gimbal (see back)


- Adjustable gimbal light fixture
- Available only with Par 36 sealed beam lamps
- Available in recessed mounting
- Matte white trim ring, spun aluminum housing

Dimensions


SQ Series

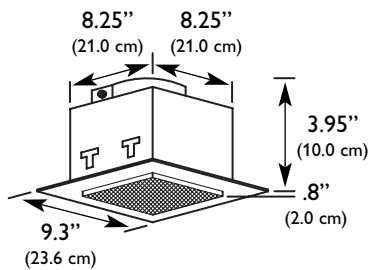


ST Series

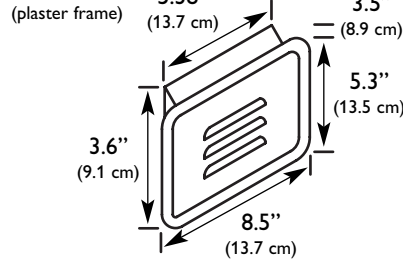


RL Series

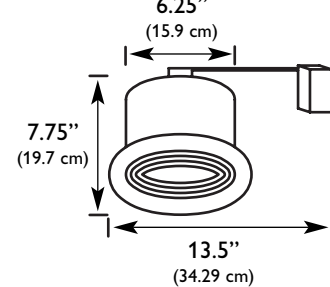

SS Series

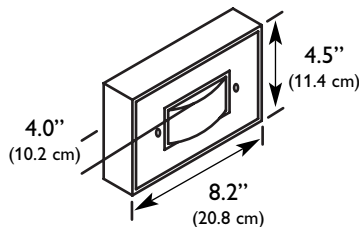

RS Series

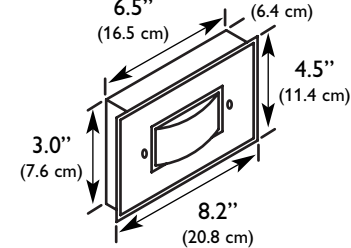

Dimensions are approximate and subject to change.


Ordering Information

SQ, ST, RL, ME, SS, RS Series, Miniature DC Bayonet Base Lamps

SERIES	VOLTAGE	WATTAGE	# OF LAMPS
RL = RL Series Recessed Round Light	6 = 6 V	6 V 12 V	(RS, SS Only) 1 = One 2 = Two
RS = RS Series Recessed Step Light w/ Lens	12 = 12 V	6 = 6 W 6 = 6 W	
SQ = SQ Series Recessed Square Light		12 = 12 W 13 = 13 W	
SS = SS Series Surface Step Light w/ Lens		18 = 18 W 18 = 18 W	
ST = ST Series Recessed Step Light		28 = 28 W	

Dimensions

RG Series

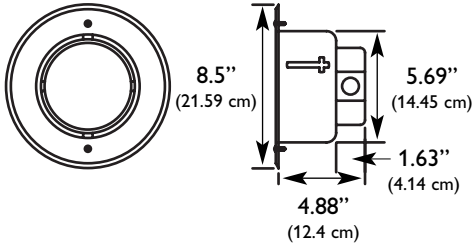

Ordering Information

RG Series, Par 36 Sealed Beam Lamps

RG	WATTAGE	
SERIES	WATTAGE	
RG = RG Series	6 V, Tungsten	12 V, Tungsten
Recessed	618 = 18 W	1212 = 12 W
Gimbal	625 = 25 W	1218 = 18 W
	630 = 30 W	1225 = 25 W
	1230 = 30 W	
	6 V, Halogen	12 V, Halogen
	H68 = 8 W	H128 = 8 W
	H612 = 12 W	H1212 = 12 W

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



272 West Stag Park Service Road • Burgaw, NC 28425
 (910) 259-1131 • FAX (800) 403-6927
www.lightguard.com

L2124R11
 1/12 IH