

# Remote Lamp Heads

- 6,12 or 24 Volt Operation
- Sealed Beam or T-5 Wedge Base Lamps, Single or Double Mount



Shown:  
Lamp Head: (1) H76B

## Thermoplastic "H" Head

- 360° adjustable beam pattern
- Constructed of white, black or tan polycarbonate
- Dual axis swivel mount



Shown: Lamp Head: (1) D66W  
Mounting Plate: (1) MW1\*



Shown: Lamp Head: (2) DSH126W  
Mounting Plate: (1) MW2\*

## Thermoplastic Wedge Base or Par 36 - Round Head

- Constructed of UL 94 V-0 thermoplastic
- White, black or tan with optional matching mounting plates
- Available with sealed beam Par 36 or wedge base or bi-pin tungsten or halogen lamps
- Lamps easily replaced by removing the snap-in retainer ring



Shown: Lamp Head: (1) J66  
Mounting Plate: (1) MW1\*



Shown: Lamp Head: (2) J66  
Mounting Plate: (1) MW2\*

## Thermoplastic Wedge Base - Rectangular Head

- Constructed of polycarbonate
- Available in white or black with optional matching mounting plates
- Features 6 V or 12 V tungsten T-5 wedge base or bi-pin lamps with easy lamp replacement by removing snap-in lens



Shown: Lamp Head: (1) PRL86  
Mounting Plate: (1) MP1S\*



Shown: Lamp Head: (2) PRL86  
Mounting Plate: (1) MP2\*

## Metal Chrome Sealed Beam Par 36 - Round Head

- Constructed of chrome plated steel
- Available with 6, 12 or 24 V sealed beam tungsten or halogen lamps
- Required for Chicago and New York City approved units with lamp wattages not less than 12 W
- Lamps easily replaced by removing snap ring



Shown: Lamp Head: (1) XA  
Mounting Plate: (1) MP1\*



Shown: Lamp Head: (2) XA  
Mounting Plate: (1) MP3\*


## Industrial Thermoplastic Sealed Beam Par 36

- Suitable for NEMA or Class I, Division 2 applications
- Constructed of gray polycarbonate
- Available with 6 V or 12 V Par 36 sealed beam tungsten or halogen lamps
- Optional shatterproof lens for food service applications
- Lamp heads are fully gasketed
- Lamps easily replaced by removing ring bezel

\*Refer to the LightGuard Options/Accessories Section for compatible mounting plates


# Remote Lamp Heads

Thermoplastic  
"H" Head

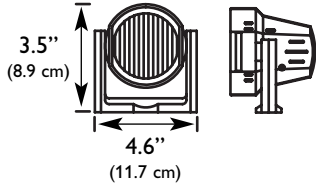


A	VOLTAGE	WATTAGE	TAN	WHITE	BLACK
HALOGEN	6 VOLT	7.0	<b>H76T</b>	<b>H76W</b>	<b>H76B</b>
	12 VOLT	12.0	<b>H126T</b>	<b>H126W</b>	<b>H126B</b>
			<b>H1212T</b>	<b>H1212W</b>	<b>H1212B</b>

Thermoplastic Wedge  
Base Round Head

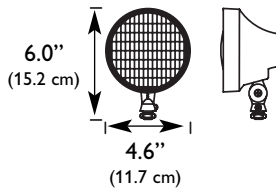


B	VOLTAGE	WATT.	TAN	WHITE	BLACK	REPLACEMENT LAMP #	
						LIGHTGUARD #	ANSI #
TUNGSTEN	6 VOLT	5.4	<b>D66T</b>	<b>D66W</b>	<b>D66B</b>	19-2-54	939
		7.2	<b>D76T</b>	<b>D76W</b>	<b>D76B</b>	19-2-58	927
		9.0	<b>D96T</b>	<b>D96W</b>	<b>D96B</b>	19-2-45	908
	12 VOLT	9.0	<b>D912T</b>	<b>D912W</b>	<b>D912B</b>	19-2-53	915
		12.5	<b>D1212T</b>	<b>D1212W</b>	<b>D1212B</b>	19-2-62	922
HALOGEN	6 VOLT	8.0	<b>DH76T</b>	<b>DH76W</b>	<b>DH76B</b>	19-2-31	
		10.0	<b>DH96T</b>	<b>DH96W</b>	<b>DH96B</b>	19-2-36	
	12 VOLT	12.0	<b>DH126T</b>	<b>DH126W</b>	<b>DH126B</b>	19-2-29	
		12.0	<b>DH1212T</b>	<b>DH1212W</b>	<b>DH1212B</b>	19-2-32	

Thermoplastic  
Wedge Base  
Rectangular Head

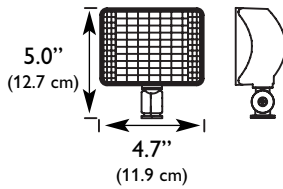


C	VOLTAGE	WATTAGE	WHITE	BLACK	REPLACEMENT LAMP #	
					LIGHTGUARD #	ANSI #
TUNGSTEN	6 VOLT	5.4	<b>J66</b>	<b>J66B</b>	19-2-54	939
		7.2	<b>J76</b>	<b>J76B</b>	19-2-58	927
		9.0	<b>J96</b>	<b>J96B</b>	19-2-45	908
	12 VOLT	9.0	<b>J912</b>	<b>J912B</b>	19-2-53	915
		12.5	<b>J1212</b>	<b>J1212B</b>	19-2-62	922
	18.0	<b>J1812</b>	<b>J1812B</b>	19-2-61	921	

Metal Chrome &  
Thermoplastic  
Sealed Beam  
Par 36

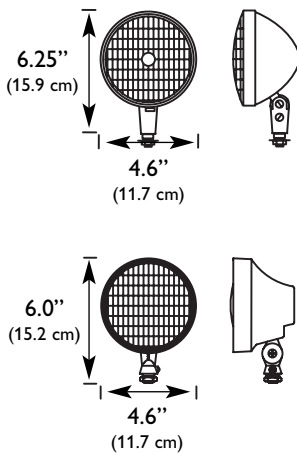

D E	VOLTAGE	WATT	METAL CHROME	THERMOPLASTIC			REPLACEMENT LAMP #	
				TAN	WHITE	BLACK	LIGHTGUARD#	ANSI #
TUNGSTEN	6 VOLT	8.0	<b>PRL86</b>	<b>DS86T</b>	<b>DS86W</b>	<b>DS86B</b>	19-1-7613	7613
		18.0	<b>PRL186</b>	<b>DS186T</b>	<b>DS186W</b>	<b>DS186B</b>	19-1-4014	4014
		25.0	<b>PRL256</b>	<b>DS256T</b>	<b>DS256W</b>	<b>DS256B</b>	19-1-4510	4510
		30.0	<b>PRL306</b>				19-1-4515	4515
	12 VOLT	12.0	<b>PRL1212</b>	<b>DS1212T</b>	<b>DS1212W</b>	<b>DS1212B</b>	19-1-4044	4044
		18.0	<b>PRL1812</b>	<b>DS1812T</b>	<b>DS1812W</b>	<b>DS1812B</b>	19-1-4414	4414
		25.0	<b>PRL2512</b>	<b>DS2512T</b>	<b>DS2512W</b>	<b>DS2512B</b>	19-1-4446	4446
24 VOLT	30.0	<b>PRL3012</b>				19-1-4405	4405	
HALOGEN	6 VOLT	50.0	<b>PRL5024</b>				19-1-4593	4593
		6.0	<b>PRLH66</b>	<b>DSH66T</b>	<b>DSH66W</b>	<b>DSH66B</b>	19-1-7556	7556
		8.0	<b>PRLH86</b>	<b>DSH86T</b>	<b>DSH86W</b>	<b>DSH86B</b>	19-1-7551	7551
	12 VOLT	12.0	<b>PRLH126</b>	<b>DSH126T</b>	<b>DSH126W</b>	<b>DSH126B</b>	19-1-7553	7553
		8.0	<b>PRLH812</b>	<b>DSH812T</b>	<b>DSH812W</b>	<b>DSH812B</b>	19-1-7555	7555
		12.0	<b>PRLH1212</b>	<b>DSH1212T</b>	<b>DSH1212W</b>	<b>DSH1212B</b>	19-1-7557	7557
		30.0	<b>PRLH3012</b>				19-1-H4405	
		50.0	<b>PRLH5012</b>				19-1-H7604	7604
	50.0	<b>PRLH5012F</b>				19-1-7614	7614	

Industrial Thermoplastic  
Sealed Beam Par 36

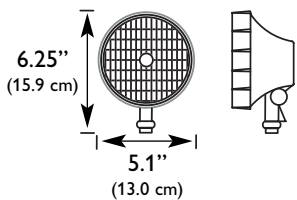

F	VOLTAGE	WATTAGE	CLASS 1, DIV 2 GRAY	NEMA RATED GRAY	REPLACEMENT LAMP #	
					LIGHTGUARD #	ANSI #
TUNGSTEN	6 VOLT	8.0	<b>XA</b>	<b>XM</b>	19-1-7613	7613
		18.0	<b>XB</b>	<b>XN</b>	19-1-4014	4014
		25.0	<b>XC</b>	<b>XO</b>	19-1-4510	4510
		30.0		<b>XP</b>	19-1-4515	4515
	12 VOLT	12.0	<b>XE</b>	<b>XQ</b>	19-1-4044	4044
		18.0	<b>XF</b>	<b>XR</b>	19-1-4414	4414
		25.0	<b>XG</b>	<b>XS</b>	19-1-4446	4446
HALOGEN	6 VOLT	30.0		<b>XT</b>	19-1-4405	4405
		6.0	<b>XY</b>	<b>XZ</b>	19-1-7556	7556
		8.0	<b>XI</b>	<b>XU</b>	19-1-7551	7551
	12 VOLT	12.0	<b>XJ</b>	<b>XV</b>	19-1-7553	7553
		8.0	<b>XK</b>	<b>XW</b>	19-1-7555	7555
		12.0	<b>XL</b>	<b>XX</b>	19-1-7557	7557
		50.0		<b>X5</b>	19-1-H7604	7604
	50.0		<b>X5F</b>	19-1-7614	7614	

Lamp heads do not include mounting plates.

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



272 West Stag Park Service Road • Burgaw, NC 28425  
(910) 259-1131 • FAX (800) 403-6927  
www.lightguard.com

L2043R20  
3/12 IH