

Type No. _____
 Job Name _____
 Catalog No. _____



Unison Series



Shown: "UR" & "UR2" Series  

- Remote Emergency Luminaire
- 6 or 12 Volt Operation
- 6 to 20 Watt Lamp Capability

Housing

- Backplate constructed of impact resistant, UL 94 V-0, 5 VA thermoplastic
- The textured cover is UV-stabilized, impact-resistant thermoplastic
- Standard backplate finish is white and is available in black as an option
- Thermoplastic backplate is designed to mount securely to a single gang recessed wall or ceiling junction box
- Suitable for wall or ceiling mounting
- The backplate is secured via a universal knockout pattern to a recessed junction box (hardware supplied by others)
- Keyhole knockout slots are provided for additional support or mounting options
- Furnished low voltage supply wires (12") are connected at the junction box to either a 6 VDC or 12 VDC emergency power source

Illumination

- Illumination is provided by MR16 or bi-pin halogen lamps and a high performance, specular parabolic reflector design which can be adjusted 180° vertically and horizontally
- A wide variety of lamps are available to meet specific egress requirements
- IES formatted files are available at www.lightguard.com

Ordering Information

SERIES	LAMP WATTAGE/VOLTAGE	HOUSING COLOR
UR = 6 Volt Unison Series UR2 = 12 Volt Unison Series	6 Volt H6 = 6W Halogen Bi-Pin H7 = 7W Halogen Bi-Pin H10 = 10W Halogen Bi-Pin H12 = 12W Halogen Bi-Pin 12 Volt T12 = 12W Halogen Bi-Pin H12 = 12W Halogen MR16 Flood H20F = 20W Halogen MR16 Flood H20S = 20W Halogen MR16 Spot	W = White B = Black

Code Compliance

- Meets ADA specifications for wall mounted lighting fixtures
- NFPA 101, NEC, BOCA, OSHA and IBC illumination standards


Application

- Ideal for commercial, retail, office and institutional locations where attractive, non-obtrusive emergency lighting is desired
- The Unison Series is a Made in the USA product

Warranty

- Product: 3 years

Dimensions

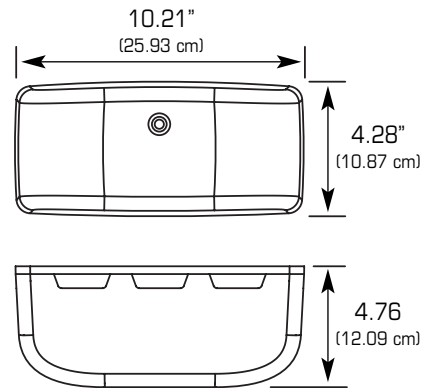



Shown: "U" Series



Unison Series

- Remote Emergency Luminaire
- 6 or 12 Volt Operation
- 6 to 20 Watt Lamp Capability

Housing

- Backplate constructed of impact resistant, UL 94 V-0, 5 VA thermoplastic
- Standard backplate finish is white and is available in black as an option
- Thermoplastic backplate is designed to mount securely to a single gang recessed wall or ceiling junction box
- Suitable for wall or ceiling mounting
- The backplate is secured via furnished hardware to a recessed junction box
- The lens/diffuser snaps to the backplate and can be secured without tools
- Keyhole slots are provided to facilitate installation
- Furnished low voltage supply wires (12") are connected at the junction box to either a 6 VDC or 12 VDC emergency power source
- The "U" Series is gasketed for outdoor areas
- If option "G" (gasketed) is selected, additional caulking may be required around edges of the backplate to provide a proper weather sea

Illumination

- Illumination is provided by a high performance, specular parabolic reflector design which can be adjusted 180° vertically and horizontally
- A wide variety of lamps are available to meet specific egress requirements
- IES formatted files are available upon request

Ordering Information

U	LAMP WATTAGE/VOLTAGE		BACKPLATE COLOR	OPTIONS
U = Unison Series	6V, Tungsten T-5 Wedge Base T66 = 6W, 6VDC T76 = 7W, 6VDC T96 = 9W, 6VDC 6V, Halogen T-2 1/4 Wedge Base H76 = 7W, 6VDC H106 = 10W, 6VDC H126 = 12W, 6VDC 6V, Halogen MR11 Style MR5 = Single 5W, 6VDC MR10 = Double 5W, 6VDC	12V, Tungsten T912 = 9W, 12VDC T1212 = 12W, 12VDC T1812 = 18W, 12VDC 12V, Halogen H1212 = 12W, 12VDC 12V, Halogen MR16 Style¹ H2012 = 20W, 12VDC	W = White B = Black	G = Gasketed for Outdoor Use ²

Code Compliance

- Meets ADA specifications for wall mounted lighting fixtures
- NFPA 101, NEC, BOCA, OSHA and IBC illumination standards


Application

- Ideal for commercial, retail, office and institutional locations where attractive, non-obtrusive emergency lighting is desired
- The Unison Series is a Made in the USA product

Warranty

Product: 3 years

Dimensions

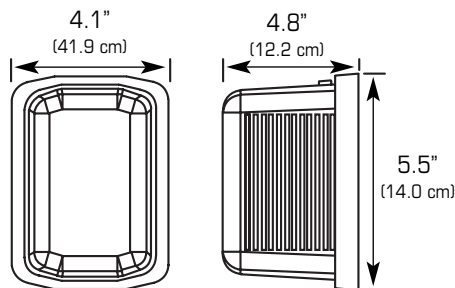

NOTES:

- 1) Halogen 20 watt, 12 VDC lamp is a MR16 style.
- 2) A form fitted gasket is supplied to be installed between the luminaire and junction box to protect against water entry. This product is not recommended for use in areas where high wind, or high pressure spray washdown could occur.